


FULL HD Network Recorder



- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920×1080P resolution
- Up to 8 SATA interfaces
- HDD quota and group management
- Dual gigabit network interfaces
- RAID 0,1,5,10 supported (-RT)

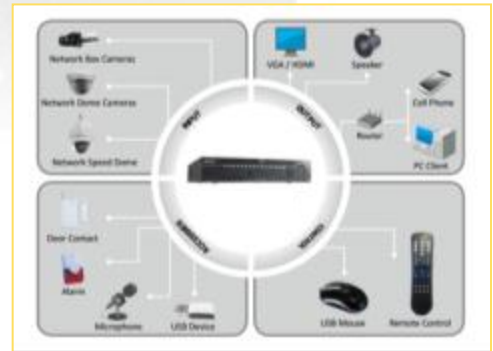

		EB5608-(RT)	EB5616-(RT)	EB5632-(RT)
Video/Audio Input	IP Video Input:	8-ch (20Mb)	16-ch (40Mb)	32-ch (80Mb)
	Two-way Audio:		1-ch BNC(2.0Vp-p, 1kΩ)	
Video/Audio Output	VGA Output:	1-ch, resolution: 1920×1080P/60Hz, 1600×1200/60Hz, 1280×1024/60Hz, 1024×768/60Hz		
	CVBS Output:	1-ch, BNC (1.0 Vp-p, 75 Ω) Resolution: 704 × 576 (PAL); 704 × 480 (NTSC)		
	HDMI Output:	1-ch, resolution: 1920 × 1080P / 60Hz, 1920×1080P / 50Hz, 1600 × 1200 / 60Hz, 1280 × 1024 / 60Hz, 1280 × 720 / 60Hz, 1024 × 768 / 60Hz		
	Recording resolution:	5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF		
	Audio Output:	2-ch BNC(Linear electrical level, 600Ω)		
Hard Disk Driver	Playback Resolution:	5MP / 3MP / 1080P / UXGA / 720P / 4CIF / VGA / DCIF / 2CIF / CIF / QCIF		
	Synchronous Playback:	8-ch	16-ch	
	Interface Type:	8 SATA Interfaces		
	Capacity:	Up to 4TB capacity for each disk		
Disk Array (-RT)	e-SATA Interface:	1 eSATA interface		
	Array Type:	RAID0, RAID1, RAID5, RAID10		
	Number of Array:	4		
External Interface	Number of Virtual Disk:	8		
	Network Interface:	2 RJ45 10M / 100M / 1000M adaptive Ethernet interfaces		
	USB Interface:	3 USB2.0 interfaces		
	Serial Interface:	1RS-485 interface, 1 RS-232 interface, 1 RS-485 keyboard interface		
	Alarm Input:	16-ch		
General	Alarm Output:	4-ch		
	Power Supply:	100~240 VAC, 6.3A, 50~60Hz		
	Consumption:	≤35W	≤40W	≤45W
	Working Temperature:	-10°C ~ +55°C (14 °F ~ 131 °F)		
	Working Humidity:	10% ~ 90%		
	Chassis:	19-inch rack-mounted 2U chassis		
	Dimensions:	445 × 470 × 90 mm (17.52" × 18.5" × 3.54")(W × D × H)		
	Weight:	≤ 8 kg (17.64 lb) (without hard disk or DVD-R/W)		